


# SLIDING GATE

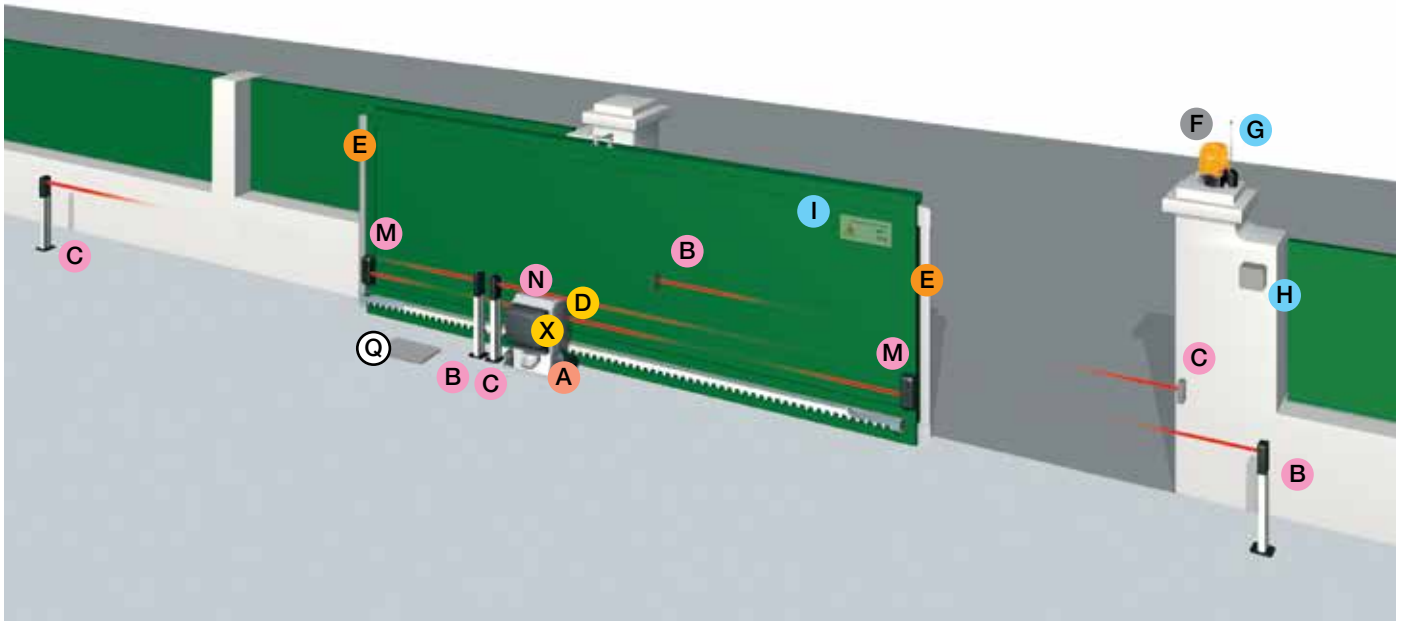

## COMPONENTS

- A** Operator (garmotor and control board)
- B** TX photocells
- C** RX photocells
- D** Card for emergency functioning during blackouts
- E** Safety sensitive edges
- F** Flashing light
- G** Antenna
- H** Selector switch  
(Key - Code - Transponder card or keyfob)
- I** Plate
- M** TX cordless photocells
- N** TX photocells
- Q** Junction box
- X** Radiofrequency card

## NOTES:

The control panel and the radiofrequency card are built-into the automation (001BK-2200T excluded)

## CABLES FOR A STANDARD INSTALLATION

CABLE LENGTH (m)	< 10	from 10 to 20	from 20 to 30
230 V AC power supply	3G x 1.5 mm <sup>2</sup>	3G x 1.5 mm <sup>2</sup>	3G x 2.5 mm <sup>2</sup>
230 - 400 V AC three-phase power supply	4G x 1.5 mm <sup>2</sup>	4G x 1.5 mm <sup>2</sup>	4G x 2.5 mm <sup>2</sup>
230 V AC motor power supply	3G x 1.5 mm <sup>2</sup>	3G x 1.5 mm <sup>2</sup>	3G x 2.5 mm <sup>2</sup>
230 - 400 V AC three-phase motor power supply-	4G x 1.5 mm <sup>2</sup>	4G x 1.5 mm <sup>2</sup>	4G x 2.5 mm <sup>2</sup>
24 V DC motor power supply	2G x 1.5 mm <sup>2</sup>	2G x 1.5 mm <sup>2</sup>	2G x 2.5 mm <sup>2</sup>
Endstop microswitches	*n. x 0.5 mm <sup>2</sup>	*n. x 0.5 mm <sup>2</sup>	*n. x 0.5 mm <sup>2</sup>
24 V AC - DC 25 W flashing light	2 x 1 mm <sup>2</sup>	2 x 1 mm <sup>2</sup>	2 x 1 mm <sup>2</sup>
230 V AC 25 W flashing light	2 x 1.5 mm <sup>2</sup>	2 x 1.5 mm <sup>2</sup>	2 x 1.5 mm <sup>2</sup>
TX photocells	2 x 0.5 mm <sup>2</sup>	2 x 0.5 mm <sup>2</sup>	2 x 0.5 mm <sup>2</sup>
RX photocells	4 x 0.5 mm <sup>2</sup>	4 x 0.5 mm <sup>2</sup>	4 x 0.5 mm <sup>2</sup>
Command devices	*n. x 0.5 mm <sup>2</sup>	*n. x 0.5 mm <sup>2</sup>	*n. x 0.5 mm <sup>2</sup>
Antenna		RG58 max 10 m	

\*n. = see product installation instructions - **Warning:** the cable section varies depending on the power of the motor and the length of the cable.