

Mechanical Retractable Bollards - Diam. 9"84 - Height 19"68 Monobloc® Line



In compliance with France's NF standard

Resistance	Weight
9,000 joules	261.80 lb
Material	Thickness
Cast Steel	0"43
<small>(Vendôme bollards are in cast steel covered by a stainless steel jacket / 0"39 + 0"07)</small>	

DESCRIPTION

Mechanical retractable bollard, Generation 6 line, height 19"68, diam. 9"84, with reflective tape. All the structural parts making up bollards are Monobloc® molded (URBACO patent), in cast steel, with a 10-year guarantee. This molding ensures everlasting alignment. The Monobloc casing (>< up to 0"94) includes guiding rails, a Monobloc crosspiece to support the piston (chromed stem), and absorbers to buffer shocks at the end of the piston stroke. Monobloc cover with 4 x A² stainless steel screws and a friction ring which ensures that the bollard remains upward in its 19"68 high jacketing. It strengthens the whole structure and minimizes internal damages in case of shock even when the bollard

is in motion (>< 0"43). A sliding locking device (patented by URBACO), with automatic wear compensation has a 10-year guarantee. It is composed of a lock rod (with 15 imprints to choose from, including 9 confidential imprints) and a bolt of lock, both in stainless steel. A service key is also supplied (captive key for sale as an option). A bronze flap door protects the lock. The structural parts are all coated with polyester thermosetting powder paint. The conception which excludes all wearing parts and the quality of manufacturing are a guarantee of durability and low maintenance costs. The optional lost casing in galvanized steel makes the installation simple and easy.

We advise that bollards should be installed out of wheel tread so as to preserve and guarantee the durability of the gas piston and the quality of paintwork and coating.

To open the access

Turn the key inside the lock. Push down the bollard head, until it is fully retracted into the ground. Locking is automatic when the bollard is retracted.

To close the access

A simple turn of the key will make the bollard rise again and lock in the upward position.

COLORS 10 standard Urbaco colors




Black - Steel Grey - Charcoal Grey - Marble Grey - Khaki - Bronze Green - Metallic Green - White - Maroon - Burgundy - Brown - Blue

OPTIONS

- COLORS: other RAL colors available

- KEYS: 6 standard imprints (triangle, pentagon, octagon, 3/4 moon)




9 special confidential imprints.




Security device enabling emergency services to access site.

2 models for each imprints : service key or captive key, each 5"51 long.



LEGEND:
1 - casing
2 - cover
3 - bollard head
4 - reflective tape

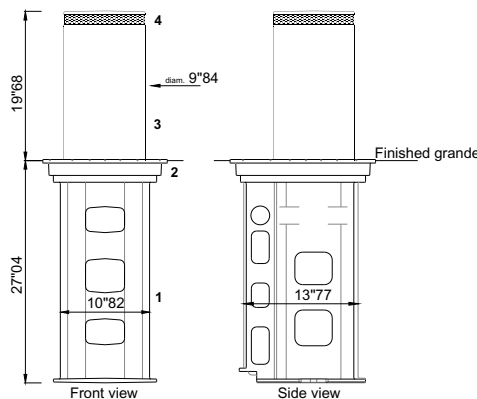

Z.A. du Couquiou - 84320 ENTRAIGUES - FRANCE
Tél. : (33) 04 90 48 08 08 - Fax : (33) 04 90 48 00 88
e-mail : urbaco@urbaco.fr