



# Technical sheet

**Pneumatic automatic retractable bollard**  
**ACROPOLE Model Ø250/10", Height 750/30"**

**Ref. BPACEF75**



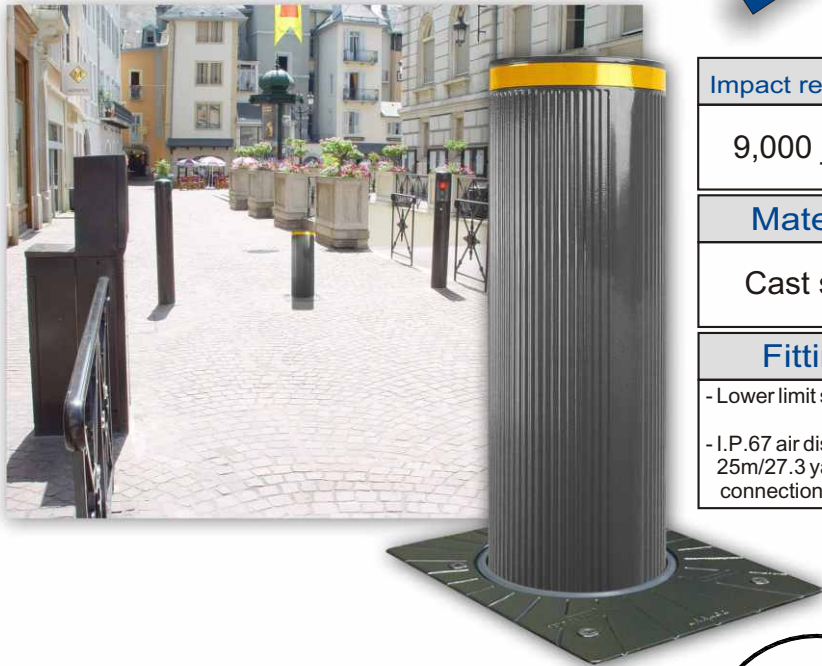


<b>Impact resistance</b>	<b>Tested durability</b>	<b>Weight</b>
9,000 joules	4.5 Million operation cycles	155 Kg/341.72 lb
<b>Material</b>	<b>Thickness</b>	<b>Colors</b>
Cast steel	11 mm/0.4"	Standard URBACO paint RAL colors (optional)
<b>Fittings</b>	<b>Functioning</b>	
- Lower limit switch - I.P.67 air distribution set (with valve, 25m/27.3 yards air tube and connections).	According to PLC program The user will lower the bollard with a proximity card, remote control, digital keypad, etc. The bollard will automatically or manually rise again	



**LEGEND :**

- 1 - Casing
- 2 - cover
- 3 - bollard head
- 4 - reflecting tape

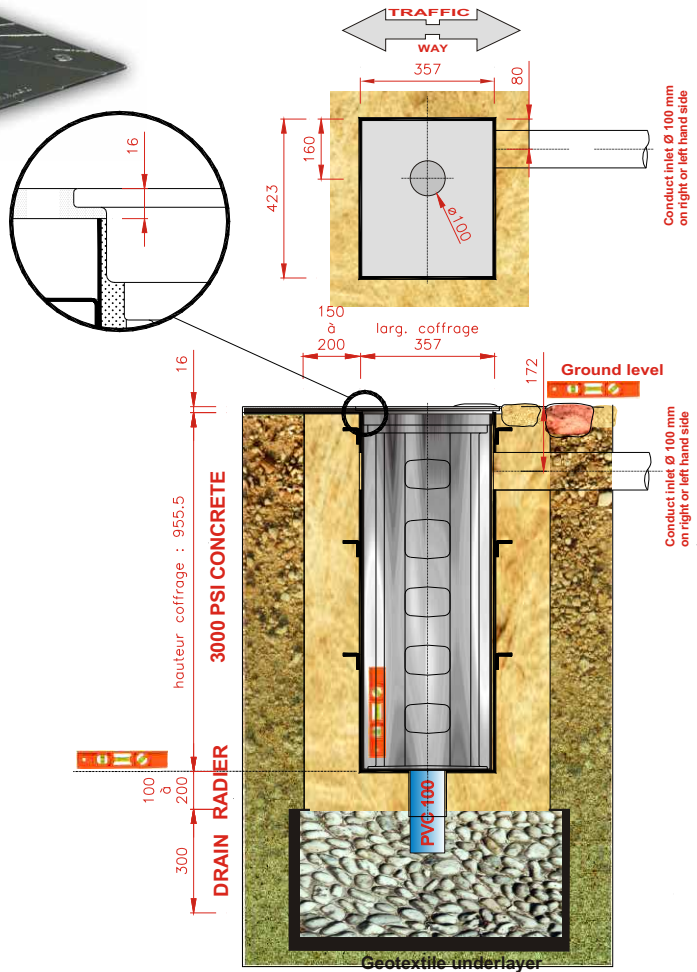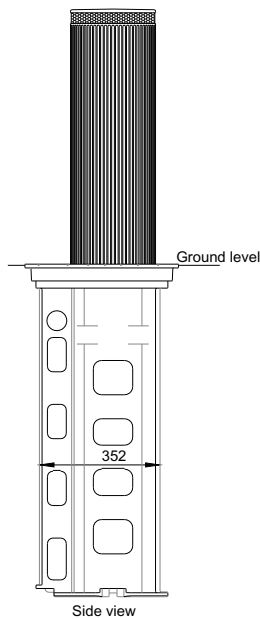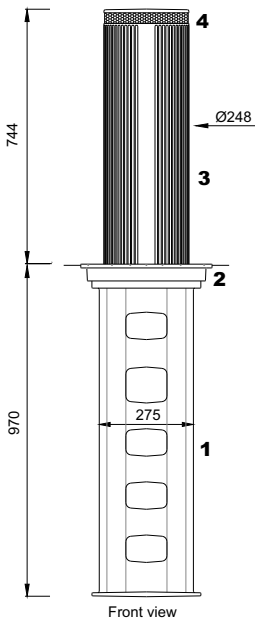

**NOTA : Natural permeable soil for drainage.**  
 (otherwise PVC tube should be connected to rainwater or sewage pipes)

**INSTALLATION PLAN**  
 for lost casing ref. BOCOFF954

**Z.A. Du Couquiou - 84320 ENTRAIGUES - FRANCE**  
**Tél. : (33) 04 90 48 08 08 - Fax : (33) 04 90 48 00 88**  
**e-mail : urbaco@urbaco.fr**