


# Technical sheet

**Pneumatic Automatic retractable bollard**  
**ATHENA Model Ø 120/5", Height 500/20"**




**Ref. BPATND50**



Impact resistance	Tested durability	Weight
2,400 joules	4 Million operation cycles	58 Kg/127.87 lb
Material	Thickness	Colors
Cast steel	11 mm/0.4"	Standard URBACO paint RAL colors (optional)
Fittings		Functioning
<ul style="list-style-type: none"> <li>- Lower limit switch</li> <li>- I.P.67 air distribution set (with valve 25m/27.3 years air tube and connections).</li> </ul>		According to PLC program The user will lower the bollard with a proximity card, remote control, radio beeper, etc. The bollard will automatically or manually rise again



LEGEND :  
 1 - casing  
 2 - cover  
 3 - bollard head  
 4 - reflecting tape

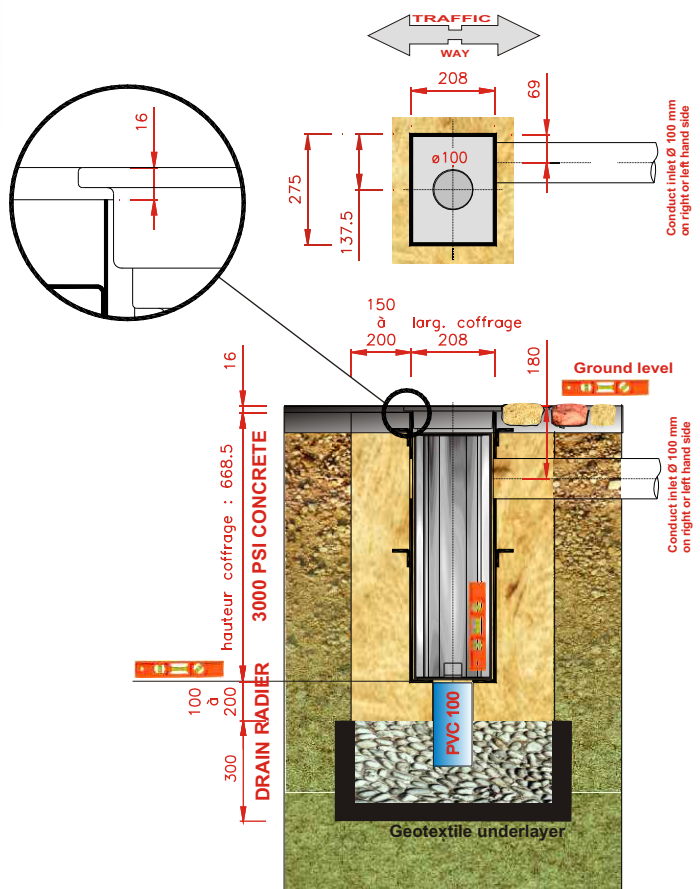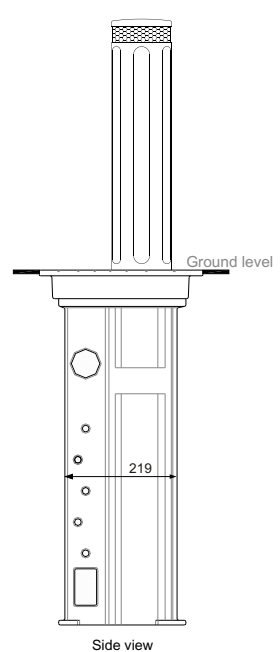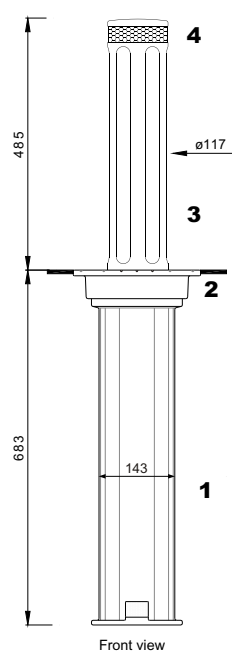

NOTA : Natural permeable soil for drainage.  
 (otherwise PVC tube should be connected to rainwater or sewage pipes)

**INSTALLATION PLAN**  
 for lost casing ref. BOCOFD667

Z.A. Du Couquiou - 84320 ENTRAIGUES - FRANCE  
 Tél. : (33) 04 90 48 08 08 - Fax : (33) 04 90 48 00 88  
 e-mail : urbaco@urbaco.fr

Propriété intellectuelle de URBACO - Ne peut être copié - Spécifications non contractuelles - Modifications possibles sans préavis