


# Technical sheet

**Pneumatic automatic retractable bollard**  
**CHATEAUNEUF Model Ø 200/8", Height 750/30"**



**Ref. BPCHPE75**

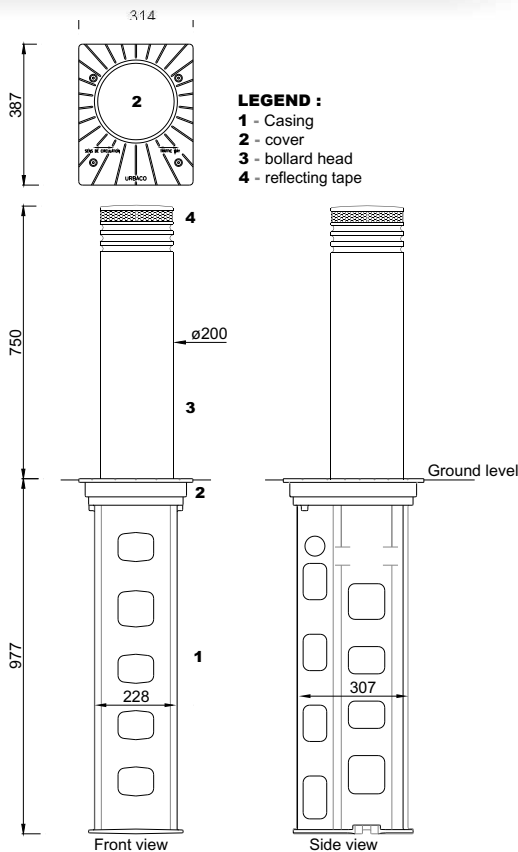

<b>Impact resistance</b>	<b>Tested durability</b>	<b>Weight</b>
5,000 joules	4.5 Million operation cycles	109 Kg/240.30 lb
<b>Material</b>	<b>Thickness</b>	<b>Colors</b>
Cast steel	11 mm/0.4"	Standard URBACO paint RAL colors (optional)
<b>Fittings</b>		<b>Functioning</b>
- Lower limit switch - I.P.67 air distribution set (with valve 25m/27.3 yars air tube and connections).		According to PLC program The user will lower the bollard with a proximity card, remote control, digital keypad, etc. The bollard will automatically or manually rise again.

**Z.A. Du Couquiou - 84320 ENTRAIGUES - FRANCE**  
**Tél. : (33) 04 90 48 08 08 - Fax : (33) 04 90 48 00 88**  
**e-mail : urbaco@urbaco.fr**