



# Technical sheet

**Pneumatic automatic retractable bollard**  
**CHATEAUNEUF Model Ø250/10", Height 750/30"**




**Ref. BCPHF75**

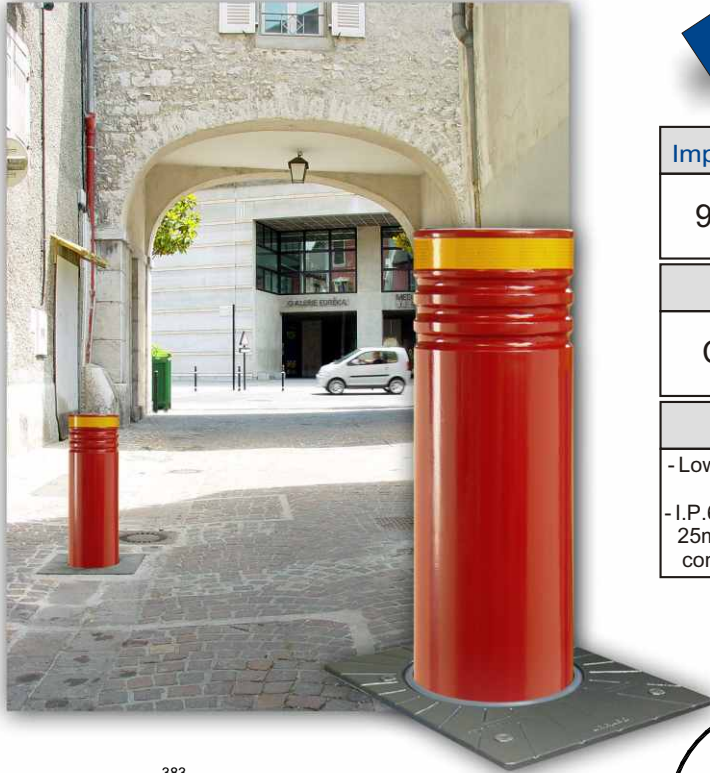

Impact resistance	Tested durability	Weight
9,000 joules	4.5 Million operation cycles	159 Kg/350.54 lb
Material	Thickness	Colors
Cast steel	11 mm/0.4"	Standard URBACO paint RAL colors (optional)
Fittings		Functioning
<ul style="list-style-type: none"> <li>- Lower limit switch</li> <li>- I.P.67 air distribution set (with valve 25m/27.3 years air tube and connections).</li> </ul>		According to PLC program The user will lower the bollard with a proximity card, remote control, digital keypad, etc. The bollard will automatically or manually rise again.



**LEGEND :**  
 1 - Casing  
 2 - cover  
 3 - bollard head  
 4 - reflecting tape

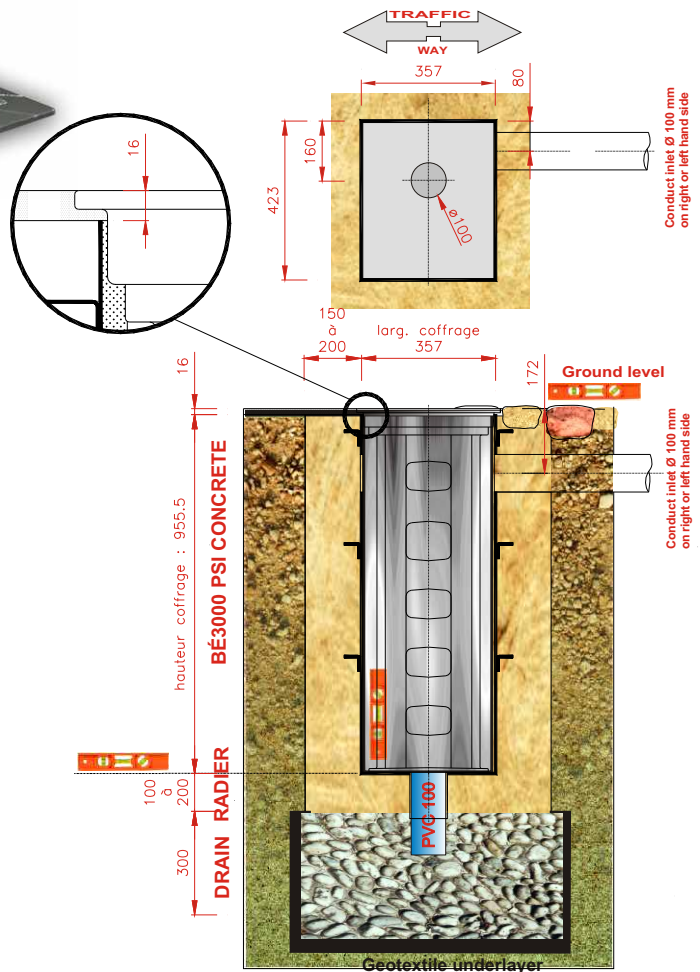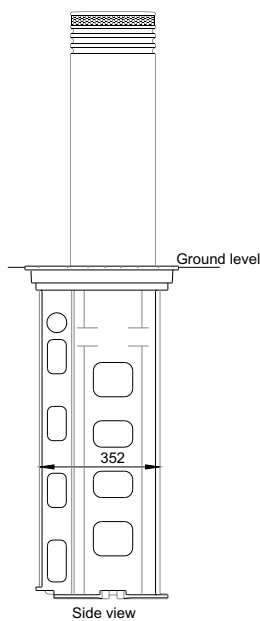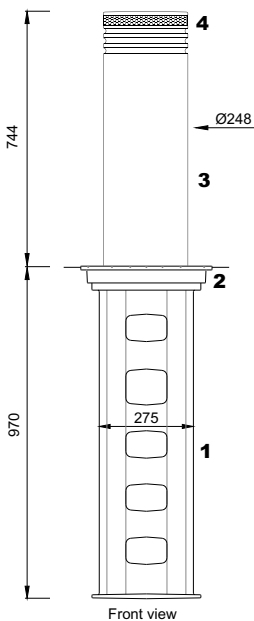

**NOTA : Natural permeable soil for drainage**  
 (otherwise PVC tube should be connected to rainwater or sewage pipes)  
**INSTALLATION PLAN**  
 for lost casing ref. BOCOFF954

**Z.A. Du Couquiou - 84320 ENTRAIGUES - FRANCE**  
 Tél. : (33) 04 90 48 08 08 - Fax : (33) 04 90 48 00 88  
 e-mail : [urbaco@urbaco.fr](mailto:urbaco@urbaco.fr)