

Technical sheet



Pneumatic Automatic retractable bollard

Modèle CYLINDER Ø 250 / H 600 lumineuse

Ref. BPCLPF60C



Impact resistance	Tested durability	Weight
9,000 joules	4,5 Million operation cycles	191 Kg/421.08 lb
Material	Thickness	Colors
Cast steel	11 mm/0.4"	Standard URBACO paint RAL colors (optional)
Fittings		Functioning
<ul style="list-style-type: none"> - Lower limit switch - I.P.67 air distribution set (with valve 25m/27.3 years air tube and connections). - bollard head with LED ring 		According to PLC program The user will lower the bollard with a proximity card, remote control, radio beeper, etc. The bollard will automatically or manually rise again

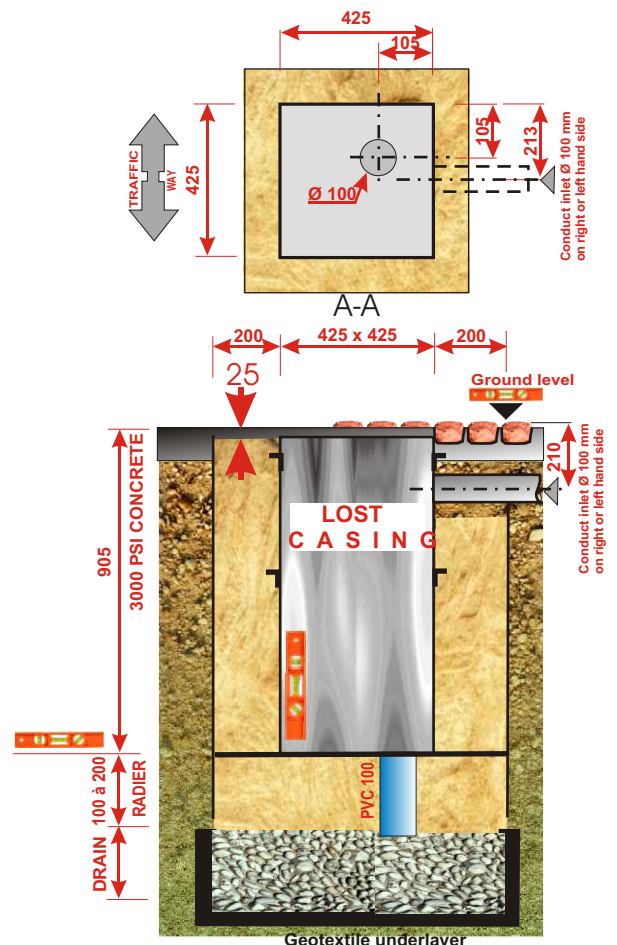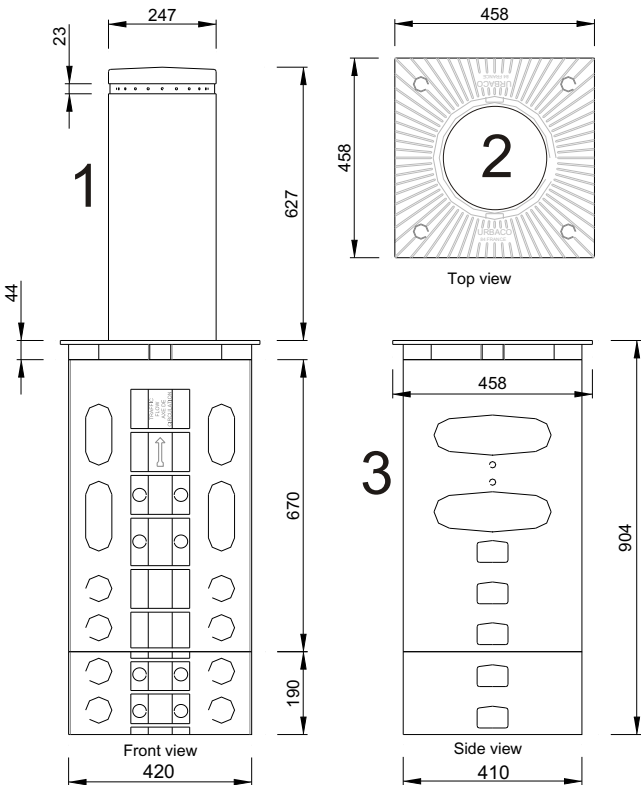

NOTA : Natural permeable soil for drainage.
(otherwise PVC tube should be connected to rainwater or sewage pipes)

INSTALLATION PLAN
for lost casing ref. BOCOFF880

Z.A. Du Couquiou - 84320 ENTRAIGUES - FRANCE
 Tél. : (33) 04 90 48 08 08 - Fax : (33) 04 90 48 00 88
 e-mail : urbaco@urbaco.fr