


Technical sheet

Pneumatic automatic retractable bollard
CYLINDER Model Ø250/10", Height 750/30"




Ref. BPCLPF75



Impact resistance	Tested durability	Weight
9,000 joules	4.5 Million operation cycles	160 Kg/352.74 lb
Material	Thickness	Colors
Cast steel	11 mm/0.4"	Standard URBACO paint RAL colors (optional)
Fittings		Functioning
<ul style="list-style-type: none"> - Lower limit switch - I.P.67 air distribution set (with valve, 25m/27.3 yards air tube and connections). 		According to PLC program. The user will lower the bollard with a proximity card, remote control, digital keypad, etc. The bollard will automatically or manually rise again



LEGEND :
 1 - Casing
 2 - cover
 3 - bollard head
 4 - reflecting tape

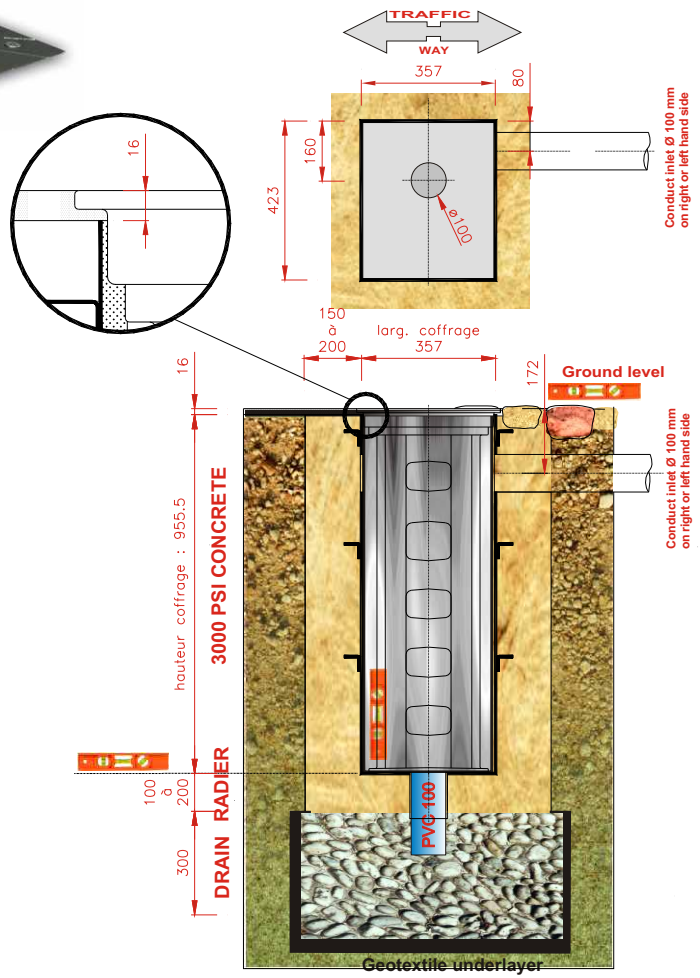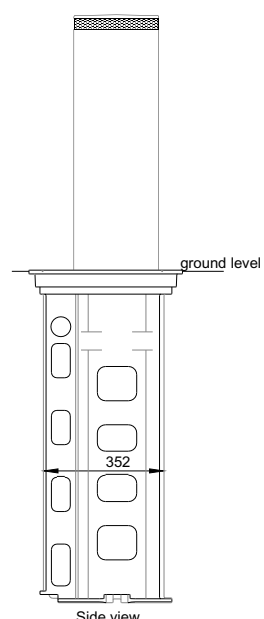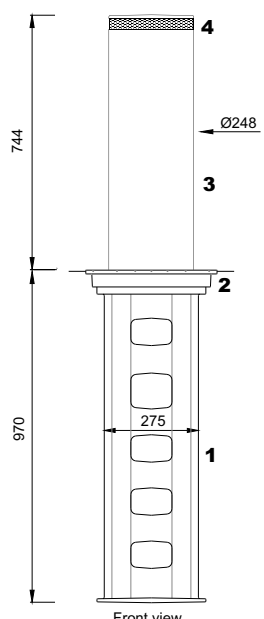

NOTA : Natural permeable soil for drainage.
 (otherwise PVC tube should be connected to rainwater or sewage pipes)
INSTALLATION PLAN
 for lost casing ref. BOCOFF954

Z.A. Du Couquiou - 84320 ENTRAIGUES - FRANCE
Tél. : (33) 04 90 48 08 08 - Fax : (33) 04 90 48 00 88
e-mail : urbaco@urbaco.fr

Propriété intellectuelle de URBACO - Ne peut être copié - Spécifications non contractuelles - Modifications possibles sans préavis