


Technical sheet

Pneumatic automatic retractable bollard
VENDOME Model Ø 200/8", Height 750/30"

Ref. BPVDME75I



Impact resistance	Tested durability	Weight
5,000 joules	4.5 Million operation cycles	103 Kg/227.08 lb
Material	Thickness	Colors
Cast steel + Stainless steel PG 220	11 mm/0.4" + 2 mm/0.08"	Stainless steel
Fittings		Functioning
- Lower limit switch - I.P.67 air distribution set (with valve, 25m/27.3 yards air tube and connections).		According to PLC program. The user will lower the bollard with a proximity car, remote control, digital keypad, etc. The bollard will automatically or manually rise again.

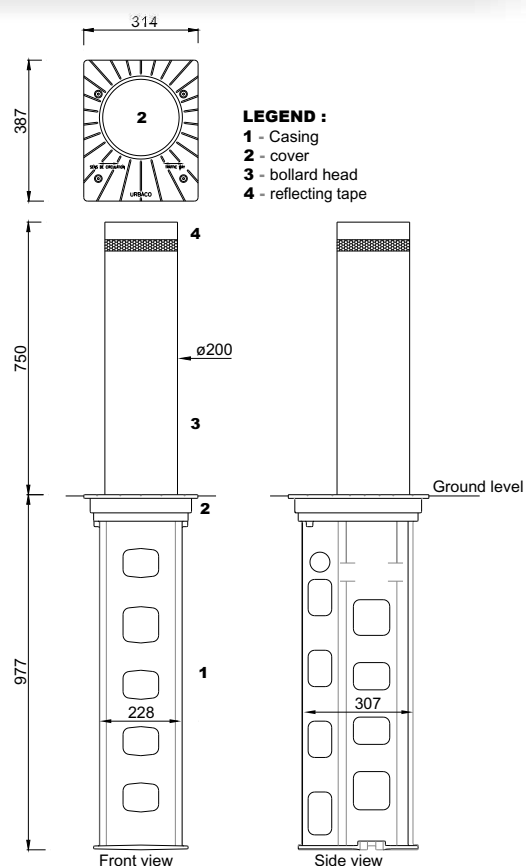

Z.A. Du Couquiou - 84320 ENTRAIGUES - FRANCE
 Tél. : (33) 04 90 48 08 08 - Fax : (33) 04 90 48 00 88
 e-mail : urbaco@urbaco.fr