


Technical sheet

Pneumatic automatic retractable bollard
VENDOME Model Ø250/10", Height 750/30"

Ref. BPVDMF75I






Impact resistance	Tested durability	Weight
9,000 joules	4.5 Million operation cycles	147kg/324.08 lb
Material	Thickness	Colors
Cast steel + stainless steel finishing polishing PG 220	14 mm/0.55"	Stainless steel
Fittings	Functioning	
- Lower limit switch - I.P.67 air distribution set (with valve 25m/27.3 yars air tube and connections).	According to PLC program The user will lower the bollard with a proximity card, remote control, digital keypad, etc. The bollard will automatically or manually rise again.	



LEGEND :

- 1 - Casing
- 2 - cover
- 3 - bollard head
- 4 - reflecting tape

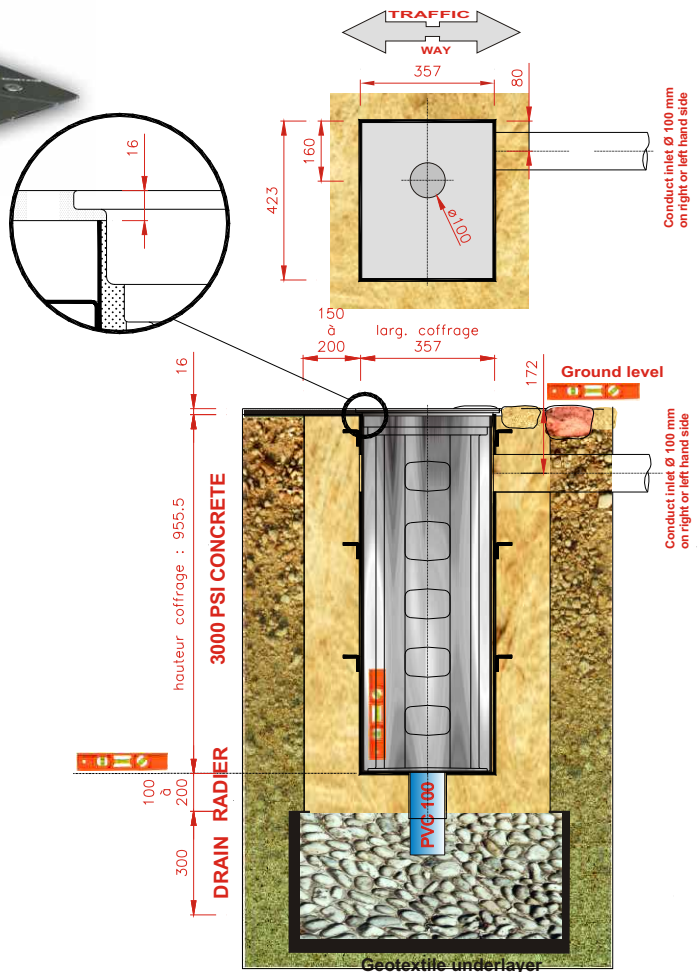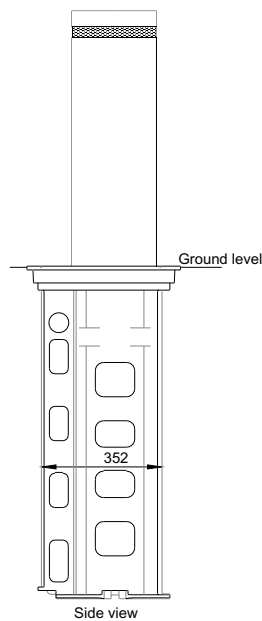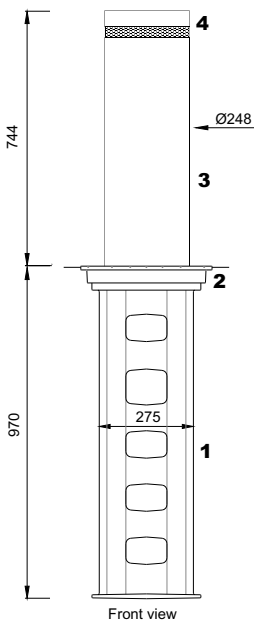

NOTA : Natural permeable soil for drainage.
 (otherwise PVC tube should be connected to rainwater or sewage pipes)

INSTALLATION PLAN
 for lost casing ref. BOCOFF954

Z.A. Du Couquiou - 84320 ENTRAIGUES - FRANCE
Tél. : (33) 04 90 48 08 08 - Fax : (33) 04 90 48 00 88
e-mail : urbaco@urbaco.fr