

Technical sheet

HIGH SECURITY PNEUMATIC AUTOMATIC OR HYDRAULIC RETRACTABLE BOLLARD



CYLINDER Model Ø 250/10",H 700/28" ou 900/36" Stainless steel

- Ref. BHCLPF70HI
- Ref. BHCLPF90HI
- Ref. BPCLPF70HI
- Ref. BPCLPF90HI



7-ton vehicle driving at 48 km/h destroyed after impact with 3 bollards (under supervision of US State Department)

Impact resistance	Tested durability	Weight
15,000 joules	4,5Million operation cycles	290 à 350 Kg
Material	Thickness	Colors
steel E24 + Stainless steel 316L	20 mm steel + 2 mm stainless steel	Standard URBACO paint RAL colors (optional)
Fittings	Functioning	
- Lower limit switch (+ Upper limit switch hydraulic). - I.P.67 air distribution set hydraulic or pneumatic	According to PLC program The user will lower the bollard with a proximity card, remote control, radio beeper, etc. The bollard will automatically or manually rise again	

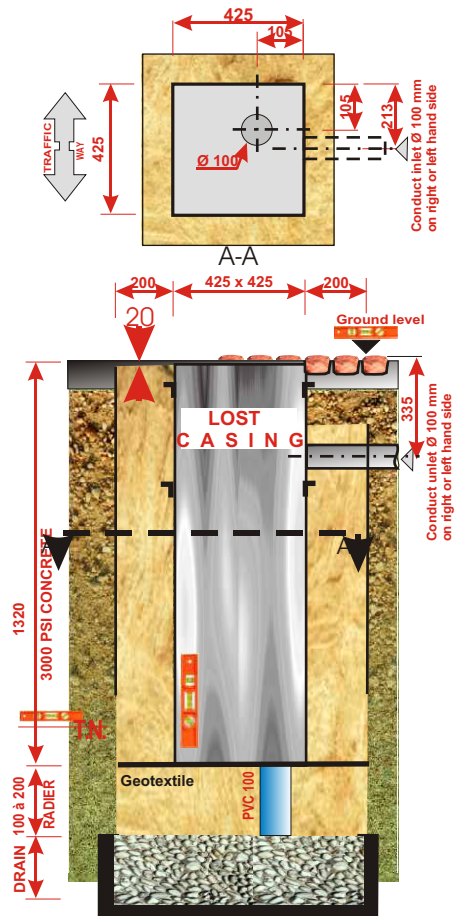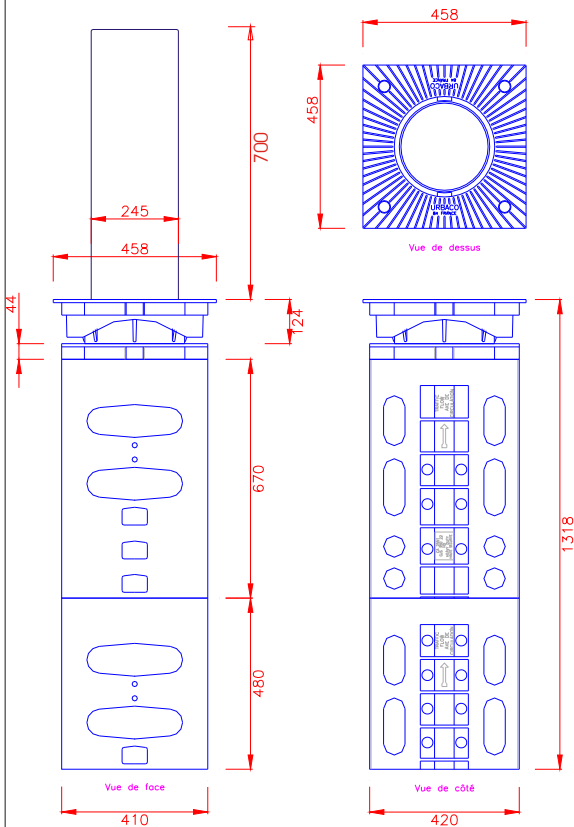

Z.A. Du Couquiou - 84320 ENTRAIGUES - FRANCE
Tél. : (33) 04 90 48 08 08 - Fax : (33) 04 90 48 00 88
e-mail : urbaco@urbaco.fr

NOTA: drain connected to sewage or rainwater pipes
INSTALLATION DRAWING
for lost casing ref. BOCOFF1300