

# Technical sheet


## Mechanical retractable bollard

**CYLINDER Model Ø250/10", Height 750/30"**

**Ref. BMCLPF75**






<b>Impact resistance</b>		<b>Weight</b>
9,000 joules		158 Kg/348.33 lb
<b>Material</b>	<b>Thickness</b>	<b>Colors</b>
Cast steel	11 mm/0.4"	Standard URBACO paint RAL colors (optional)
<b>Opening of Access</b>		<b>Closing of Access</b>
1- Unlock with the key 2- With the push of a foot the bollard retracts in the casing		1- Turn the key back The bollard raises and automatically locks in the up position



**LEGEND :**

- 1 - Casing
- 2 - cover
- 3 - bollard head
- 4 - reflecting tape

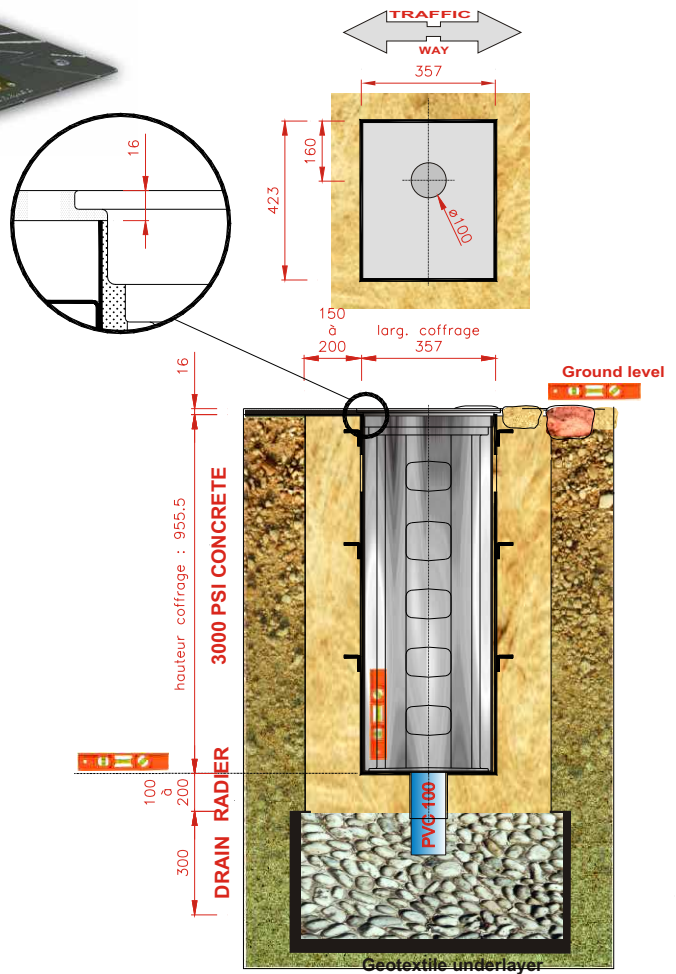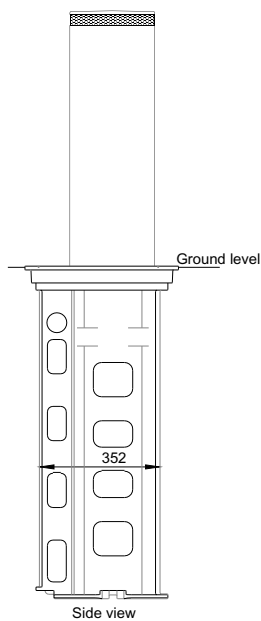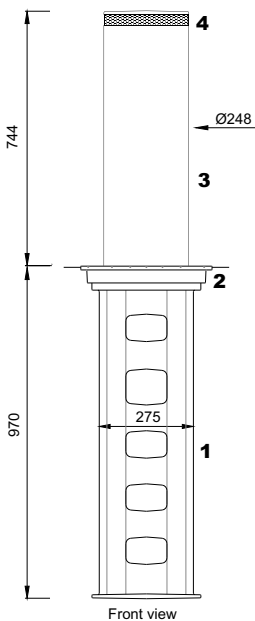

**NOTA : Natural permeable soil for drainage.**  
(otherwise PVC tube should be connected to rainwater or sewage pipes)

**INSTALLATION PLAN**  
for lost casing ref. BOCOFF954

**Z.A. Du Couquiou - 84320 ENTRAIGUES - FRANCE**  
Tél. : (33) 04 90 48 08 08 - Fax : (33) 04 90 48 00 88  
e-mail : [urbaco@urbaco.fr](mailto:urbaco@urbaco.fr)