



Technical sheet

Mechanical retractable bollard

CYLINDER Model flat top Ø 250/10", Height 600/24"

Ref. **BMCLPF60**

Impact resistance		Weight	
9,000 joules		162 Kg/357.15 lb	
Material	Thickness	Colors	
Cast steel	11 mm/0.4"	Standard URBACO paint RAL colors (optional)	
Opening of Access		Closing of Access	
1- Unlock with the key 2- With the push of a foot the bollard retracts in the casing		1- Turn the key back. The bollard raises and automatically locks in the up position	

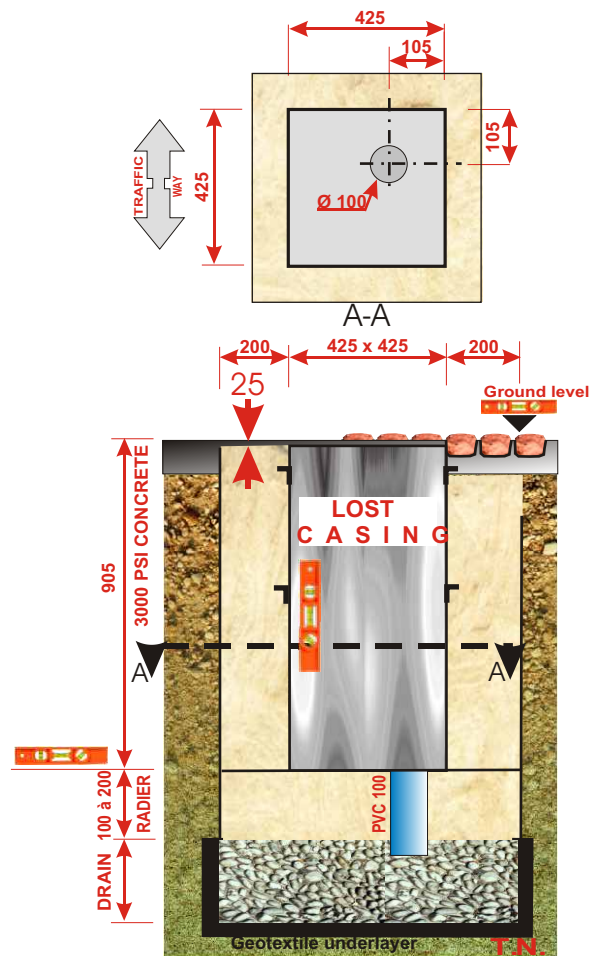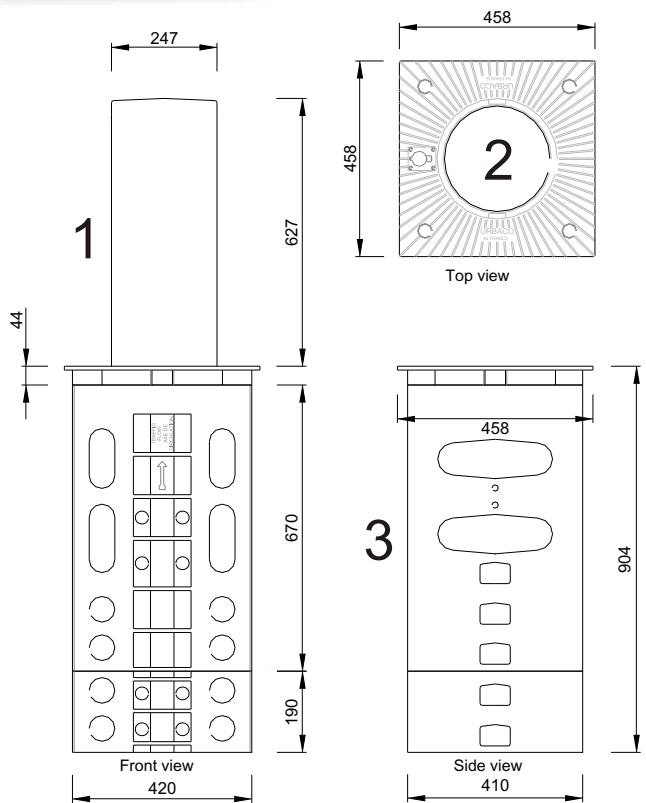

Z.A. Du Couquiou - 84320 ENTRAIGUES - FRANCE
 Tél. : (33) 04 90 48 08 08 - Fax : (33) 04 90 48 00 88
 e-mail : urbaco@urbaco.fr

NOTA : Natural permeable soil for drainage.
 (otherwise PVC tube should be connected to rainwater or sewage pipes)
INSTALLATION PLAN
 for lost casing ref. BOCOFF880