


Technical sheet



Mechanical retractable bollard

VILLENEUVE Model Ø 250/10", Height 650/26"

Ref. **BMVNVF65**

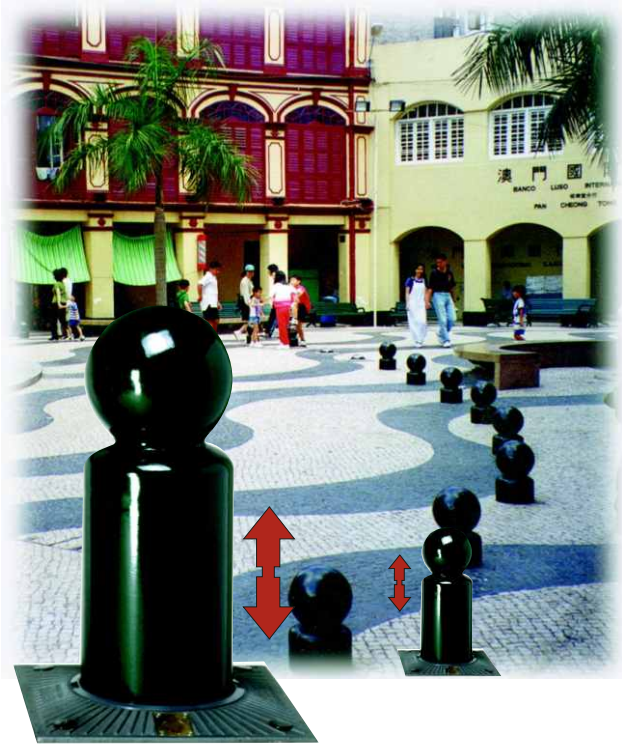

Impact resistance		Weight	
9,000 joules		155 Kg/341.72 lb	
Material	Thickness	Colors	
Cast steel	11 mm/0.4"	Standard URBACO paint RAL colors (optional)	
Opening of Access		Closing of Access	
1 - Unlock with the key 2 - With the push of a foot the bollard retracts in the casing		1 - Turn the key back The bollard raises and automatically locks in the up position	

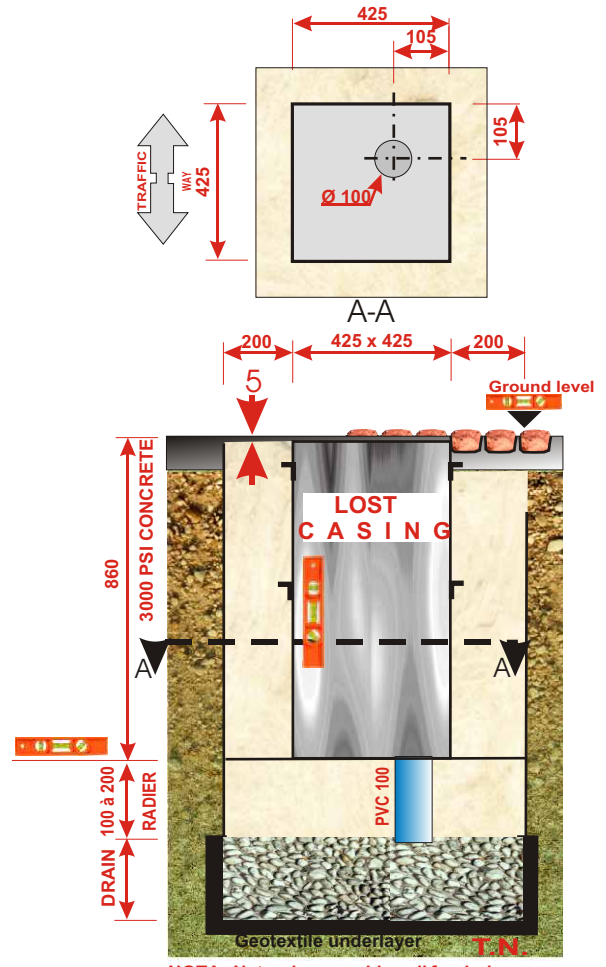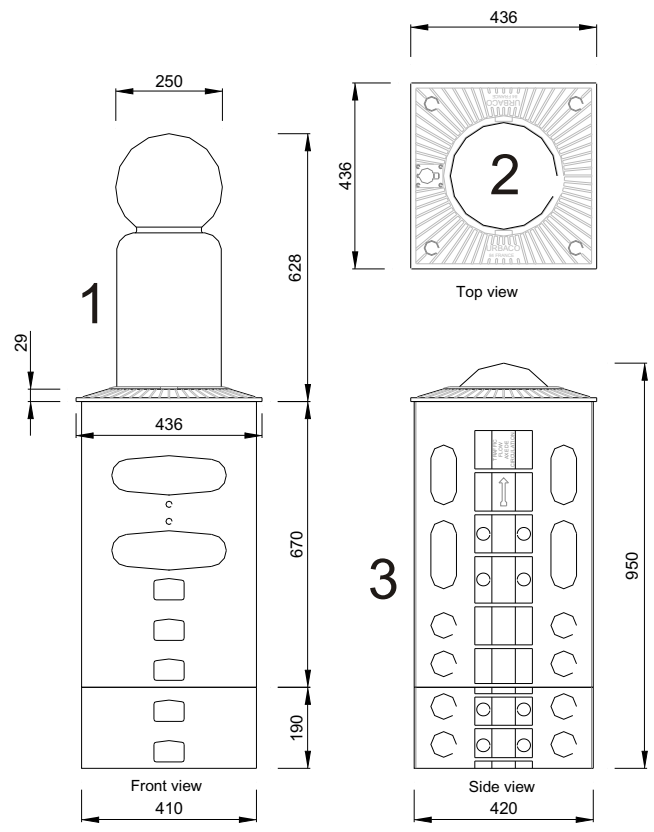

Z.A. Du Couquiou - 84320 ENTRAIGUES - FRANCE
 Tél. : (33) 04 90 48 08 08 - Fax : (33) 04 90 48 00 88
 e-mail : urbaco@urbaco.fr

NOTA : Natural permeable soil for drainage.
 (otherwise PVC tube should be connected to rainwater or sewage pipes)
INSTALLATION PLAN
 for lost casing ref. BOCOFF855