


PARKING SPACE SAVER

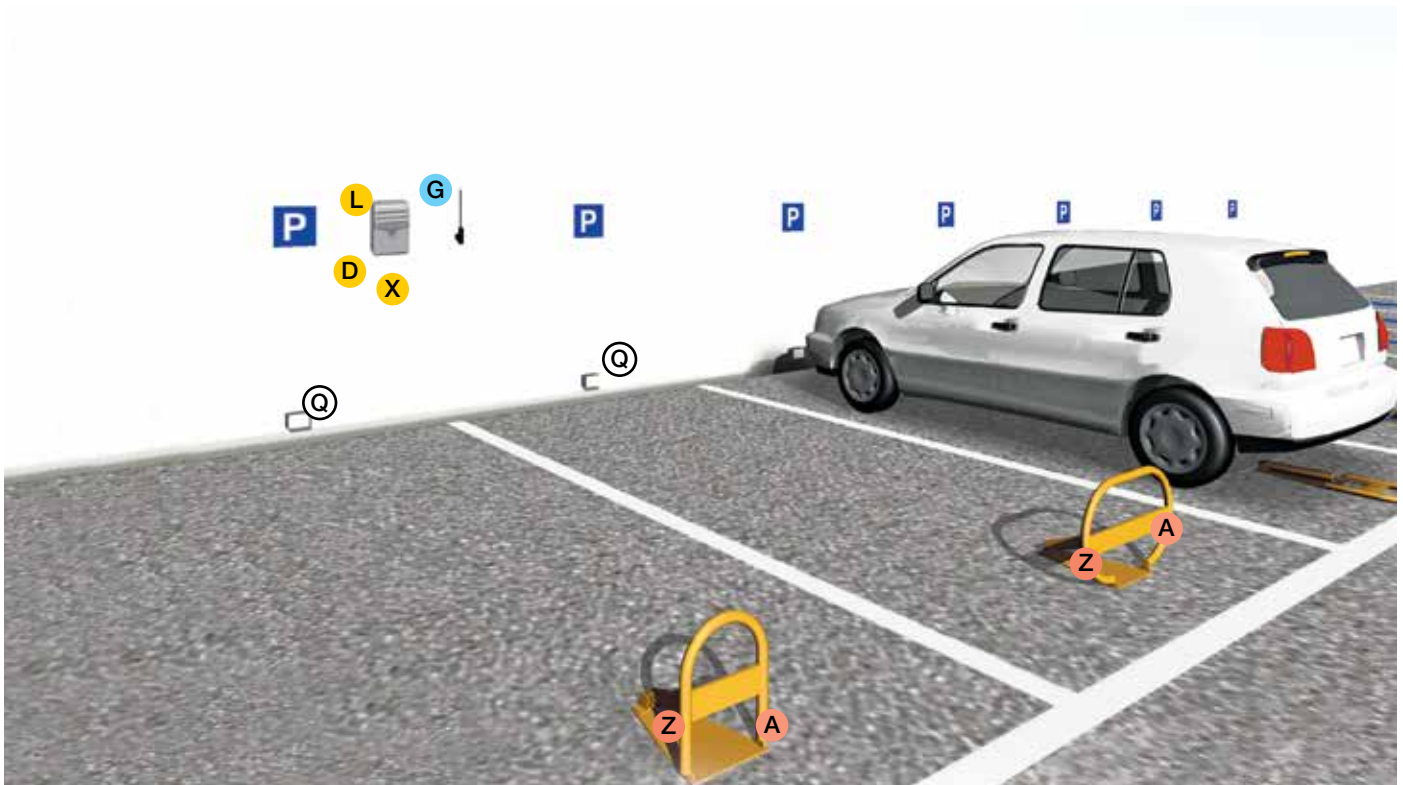

COMPONENTS

- A Gearmotors
- D Card for emergency functioning during blackouts
- G Antenna
- L Control panel
- Q Junction box
- X Radiofrequency card
- Z Release device

CABLES FOR A STANDARD INSTALLATION

CABLE LENGTH (m)	< 10	from 10 to 20	from 20 to 30
230 V AC power supply	3G x 1.5 mm ²	3G x 1.5 mm ²	3G x 2.5 mm ²
230 V AC motor power supply	3G x 1.5 mm ²	3G x 1.5 mm ²	3G x 2.5 mm ²
24 V DC motor power supply	2G x 1.5 mm ²	2G x 1.5 mm ²	2G x 2.5 mm ²
Endstop microswitches	*n. x 0.5 mm ²	*n. x 0.5 mm ²	*n. x 0.5 mm ²
24 V AC - DC 25 W flashing light	2 x 1 mm ²	2 x 1 mm ²	2 x 1 mm ²
230 V AC 25 W flashing light	2 x 1.5 mm ²	2 x 1.5 mm ²	2 x 1.5 mm ²
TX photocells	2 x 0.5 mm ²	2 x 0.5 mm ²	2 x 0.5 mm ²
RX photocells	4 x 0.5 mm ²	4 x 0.5 mm ²	4 x 0.5 mm ²
Command devices	*n. x 0.5 mm ²	*n. x 0.5 mm ²	*n. x 0.5 mm ²
Antenna		RG58 max 10 m	

*n. = see product installation instructions - **Warning:** the cable section varies depending on the power of the motor and the length of the cable.