


The command for all operators

- Safe and reliable thanks to the electronic anti-tampering system.
- Radio technology when cabling is not possible.
- In aluminium and stainless steel to provide resistance, reliability and durability over time.



Dimensions (mm)

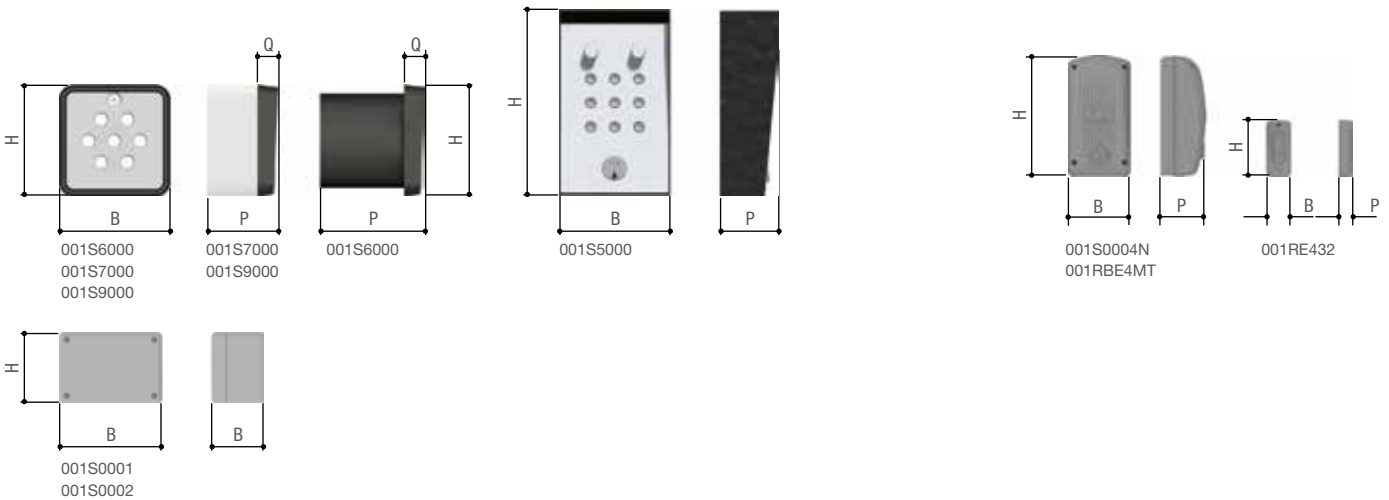

Dimensions table (mm)

| MODELS | APPLICATION | B (mm) | H (mm) | P (mm) | Q (mm) |
|---------------|------------------|--------|--------|--------|--------|
| S5000 | SURFACE MOUNTING | 80 | 130 | 40 | - |
| S6000 | FLUSH MOUNTING | 70 | 70 | 73 | 13 |
| S7000 | SURFACE MOUNTING | 70 | 70 | 31 | 13 |
| S9000 | SURFACE MOUNTING | 70 | 70 | 31 | 13 |
| S0001 • S0002 | SURFACE MOUNTING | 124 | 84 | 62 | - |
| RE432 | SURFACE MOUNTING | 46 | 108 | 23 | - |
| RBE4MT | SURFACE MOUNTING | 104 | 224 | 87 | - |
| S0004N | SURFACE MOUNTING | 104 | 224 | 87 | - |

Technical features

| MODELS | S5000 | S6000 | S7000 | S9000 |
|---------------------------------|-------------------|-------------------|-------------------|-------------------------|
| Protection rating (IP) | 54 | 54 | 54 | 54 |
| Power supply (V) | 12 - 24 AC - DC | 12 - 24 AC - DC | 12 - 24 AC - DC | 1 BATTERY GP23A 12 V DC |
| Combinations | 16,777,216 | 1,679,616 | 1,679,616 | 1,562,500 |
| Frequency of radio signal (MHz) | - | - | - | 433.92 |
| Code digits | 8 Max. | 6 Max. | 6 Max. | 8 Max. |
| Operating temperature (°C) | -20 ÷ +55 | -20 ÷ +55 | -20 ÷ +55 | -20 ÷ +55 |
| Material | ALUMINIUM - STEEL | ALUMINIUM - STEEL | ALUMINIUM - STEEL | ALUMINIUM - STEEL |

● 12 - 24 V AC - DC

