



Emergency device in case of blackouts


- For sliding doors, when an emergency opening is required.
- Integrates perfectly with CAME's S40 series door profiles.
- Ground slide guide to allow rotation of the door for the emergency opening.
- The special and safe profiles for opening the door from outside.
- The antipanic system can be fitted to both moving and fixed leaves.

WARNING:

For door leaves greater than 1,100 mm and up to 1,500 mm it is MANDATORY to fit the accessory carriage supplied in the package.

In this case, the max weight of the moving leaf is indicated in the LIMITS TO USE table. On leaves lesser than 1,100 mm, fitting the carriage results in the best possible performance from the operator. Proper working of the carriage is ensured when the floor is perfectly smooth.

Dimensions (mm)

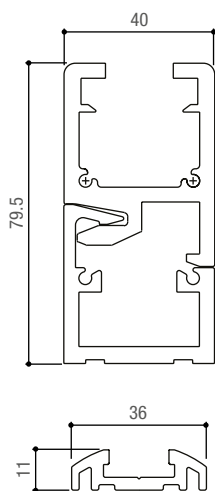

MI6010 • MI6110 • SIPA20 • SIPA21
1 MOVING LEAF



MI6020 • MI6120 • SIPA22 • SIPA 23
2 MOVING LEAVES



MI6040 • MI6140 • SIPA26 • SIPA27
2 MOVING LEAVES + 2 FIXED LEAVES



MI6030 • MI6130 • SIPA24 • SIPA25
1 MOVING LEAF + 1 FIXED LEAF LEAVES

Limits to use

RODEO	SIPARIO	MAX WIDTH OF LEAF/LEAVES (mm)	MOVING LEAVES - FIXED LEAVES
MI6010	SIPA20	1,100	YES - NO
MI6110	SIPA21	1,500	YES - NO
MI6020	SIPA22	1,100 + 1,100	YES - NO
MI6120	SIPA23	1,500 + 1,500	YES - NO
MI6030	SIPA24	1,100	YES - YES
MI6130	SIPA25	1,500	YES - YES
MI6040	SIPA26	1,100 + 1,100	YES - YES
MI6140	SIPA27	1,500 + 1,500	YES - YES
		RODEO	SIPARIO
		MAX WIDTH OF LEAF (mm)	MAX WIDTH OF LEAF (mm)
		MAX LEAF WEIGHT (kg)	MAX LEAF WEIGHT (kg)
		500 / 120	-
		600 / 90	-
		700 / 80	700 / 80
		800 / 70	800 / 70
		900 / 60	900 / 60
		1,000 - 1,500 / 40	1,000 - 1,500 / 40

